


CE2777

Year of Production
Ex: 2023->23

BB XXX



Batch NO.

0-90 degree of slope application

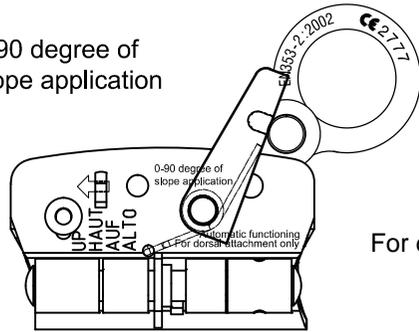


UP
HAUT
AUF
ALTO

Automatic functioning
For dorsal attachment only

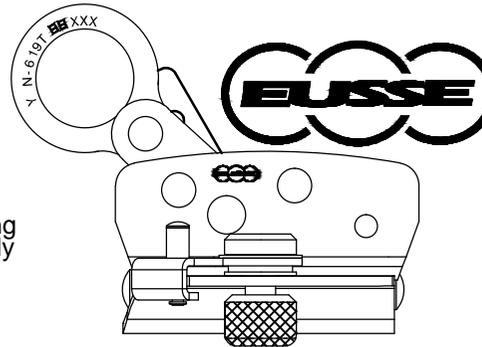

XXX
BATCH NO.

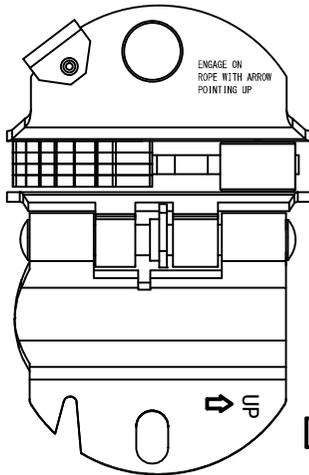

ENGAGE ON
ROPE WITH ARROW
POINTING UP

UP

MAX:30"/750mm(CSA),36"(ANSI)



For Rope Size
1/2"~9/16"Dia.
(ϕ 12.7~ ϕ 14mm)
BREAKING STRENGTH
résistance à la rupture
6000 LBS(27kN)

WARNING/AVERTISSEMENT!
MANUFACTURER'S INSTRUCTIONS MUST BE
READ AND UNDERSTOOD PRIOR TO USE.
LES INSTRUCTIONS DU FABRICANT DOIVENT
ÊTRE LUES ET COMPRISES AVANT L'UTILISATION.

△	Update	23.10.06	Wei
SYM.	REVISION DESCRIPTION	DATE	REVISION BY

(DIMENSION IN MM)

YOKE [®] INDUSTRIAL CORP. #39, 33rd Road, Taichung Industrial Park, Taichung 407, Taiwan, R.O.C. Tel: +886-4-350-8088 Fax: +886-4-350-1001	DRAWING NAME	Rope Grab						
	MATERIAL	Stainless Steel	DRAWING BY	Barry	DRAWING DATE	2016/12/12	EDITION	2
	FINISH	Polished	CHECKED BY		APPROVED BY		REVISION DATE	
	MIN. BREAK	6000LBS/27kN	SCALE	1:2	DRAWING NUMBER	N-619T/N1577		